

| | | |
|---|--|--|
| FORM PTO-1390 (REV. 5-93) | U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE | ATTORNEY'S DOCKET NUMBER 10191/1883 |
| TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371 | | U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <div style="font-size: 1.5em; font-weight: bold;">09/856906</div> |
| INTERNATIONAL APPLICATION NO. PCT/DE00/03422 | INTERNATIONAL FILING DATE 28 September 2000 (28.09.00) | PRIORITY DATE CLAIMED: 29 September 1999 (29.09.99) |
| TITLE OF INVENTION FUEL INJECTOR | | |
| APPLICANT(S) FOR DO/EO/US Hubert STIER | | |
| <p>Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.</p> <ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) immediately rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (unsigned). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <p>Items 11. to 16. below concern other document(s) or information included:</p> <ol style="list-style-type: none"> 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. 14. <input checked="" type="checkbox"/> A substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: International Search Report (translated), and PCT/RO/101. | | |

EXPRESS MAIL NO.: EL245834291US

17. ☒ The following fees are submitted:**Basic National Fee (37 CFR 1.492(a)(1)-(5)):**Search Report has been prepared by the EUROPEAN PATENT OFFICE or
JPO \$860.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) \$690.00

No international preliminary examination fee paid to USPTO (37 CFR 1.482) but
international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$710.00Neither international preliminary examination fee (37 CFR 1.482) nor international search
fee (37 CFR 1.445(a)(2)) paid to USPTO \$1,000.00International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims
satisfied provisions of PCT Article 33(2)-(4) \$100.00

CALCULATIONS | PTO USE ONLY

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$ 860

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months
from the earliest claimed priority date (37 CFR 1.492(e)).

\$

| Claims | Number Filed | Number Extra | Rate | |
|---|--------------|--------------|------------|------|
| Total Claims | 11 - 20 = | 0 | X \$18.00 | \$ 0 |
| Independent Claims | 2 - 3 = | 0 | X \$80.00 | \$ 0 |
| Multiple dependent claim(s) (if applicable) | | | + \$270.00 | \$ |

TOTAL OF ABOVE CALCULATIONS =

\$ 860

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must
also be filed. (Note 37 CFR 1.9, 1.27, 1.28).

\$

SUBTOTAL =

\$ 860

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

TOTAL NATIONAL FEE =

\$ 860

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

\$

TOTAL FEES ENCLOSED =

\$ 860

Amount to be:

refunded \$

charged \$

a. ☐ A check in the amount of \$_____ to cover the above fees is enclosed.b. ☒ Please charge my Deposit Account No. 11-0600 in the amount of **\$860.00** to cover the above fees. A duplicate copy of this sheet
is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit
Account No. 11-0600. A duplicate copy of this sheet is enclosed.**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be
filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Kenyon & Kenyon

One Broadway

New York, New York 10004

SIGNATURE

Richard L. Mayer, Reg. No. 22,490

NAME

DATE



26646

PATENT TRADEMARK OFFICE

09/856906

JC18 Rec'd PCT/PTO 29 MAY 2001

[10191/1883]

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

- Applicant(s) : Hubert STIER
Serial No. : To Be Assigned
Filed : Herewith
For : FUEL INJECTOR
Art Unit : To Be Assigned
Examiner : To Be Assigned

Assistant Commissioner
for Patents
Washington, D.C. 20231
Box Patent Application

**PRELIMINARY AMENDMENT AND
37 C.F.R. § 1.125 SUBSTITUTE SPECIFICATION STATEMENT**

SIR:

Please amend the above-identified application before examination, as set forth below.

IN THE SPECIFICATION AND ABSTRACT:

In accordance with 37 C.F.R. § 1.121(b)(3), a Substitute Specification (including the Abstract, but without claims) accompanies this response. It is respectfully requested that the Substitute Specification (including Abstract) be entered to replace the Specification of record.

IN THE CLAIMS:

On the first page of the claims, first line, change "What is claimed is:" to:
--What Is Claimed Is--.

Please cancel original claims 1 to 6, without prejudice, in the underlying PCT
Application No. PCT/DE00/03422.

EL24583429145

Please add the following new claims:

7. (New) A fuel injector for a fuel injection system of an internal combustion engine, comprising:
- a solenoid coil;
 - a first resetting spring;
 - a second resetting spring;
 - an armature that can be acted upon by the solenoid coil in a stroke direction in opposition to the first resetting spring, the armature being acted upon by the second resetting spring;
 - a valve-closure member;
 - a valve needle connected to the valve-closure member and including a first limit stop for the armature;
 - a valve seat cooperating with the valve-closure member;
 - a connecting part formed of a magnetic material and on which is supported the valve seat;
 - a stationary second limit stop configured on the connecting part and provided for the armature; and
 - a magnetic restricter disposed in a vicinity of the stationary second limit stop and arranged on at least one of the connecting part and the armature, wherein:
 - the second resetting spring acts upon the armature contrary to the stroke direction, and
 - in a resting position when the solenoid coil is not excited, the second resetting spring holds the armature in position at the stationary second limit stop such that the armature is positioned at a preestablished distance from the first limit stop, configured on the valve needle.
8. (New) The fuel injector according to claim 7, wherein:
- the fuel injector is for directly injecting a fuel into a combustion chamber of the internal combustion engine.

9. (New) A fuel injector for a fuel injection system of an internal combustion engine, comprising:
- a solenoid coil;
 - a first resetting spring;
 - a second resetting spring;
 - an armature that can be acted upon by the solenoid coil in a stroke direction in opposition to the first resetting spring, the armature being acted upon by the second resetting spring;
 - a valve-closure member;
 - a valve needle connected to the valve-closure member and including a first limit stop for the armature;
 - a valve seat cooperating with the valve-closure member;
 - a connecting part formed of a non-magnetic material and on which is supported the valve seat; and
 - a stationary second limit stop configured on the connecting part and provided for the armature, wherein:
 - the second resetting spring acts upon the armature contrary to the stroke direction, and
 - in a resting position when the solenoid coil is not excited, the second resetting spring holds the armature in position at the stationary second limit stop such that the armature is positioned at a preestablished distance from the first limit stop, configured on the valve needle.
10. (New) The fuel injector according to claim 9, wherein:
- the fuel injector is for directly injecting a fuel into a combustion chamber of the internal combustion engine.
11. (New) The fuel injector according to claim 7, further comprising:
- an armature guide integrated in the connecting part, wherein:
 - the stationary second limit stop is integrated in the connecting part.

0936506 102301

12. (New) The fuel injector according to claim 9, further comprising:
an armature guide integrated in the connecting part, wherein:
the stationary second limit stop is integrated in the connecting part.
13. (New) The fuel injector according to claim 11, further comprising:
an external pole, wherein:
the armature cooperates with the external pole, the armature guide, and the
stationary second limit stop.
14. (New) The fuel injector according to claim 12, further comprising:
an external pole, wherein:
the armature cooperates with the external pole, the armature guide, and the
stationary second limit stop.
15. (New) The fuel injector according to claim 7, wherein:
the magnetic restricter is arranged at a periphery of a segment of the armature
that is aligned with the valve needle.
16. (New) The fuel injector according to claim 7, further comprising:
an external pole; and
a casing formed of a non-magnetic material and arranged between the connecting part
and the external pole.
17. (New) The fuel injector according to claim 9, further comprising:
an external pole; and
a casing formed of a non-magnetic material and arranged between the connecting part
and the external pole.

Remarks

This Preliminary Amendment cancels original claims 1 to 6 without prejudice, in the underlying PCT Application No. PCT/DE00/03422. The Preliminary Amendment also adds new claims 7-17. The new claims conform the claims to U.S. Patent and Trademark Office rules and do not add new matter to the application.

In accordance with 37 C.F.R. § 1.121(b)(3), the Substitute Specification (including the Abstract, but without the claims) contains no new matter. The amendments reflected in the Substitute Specification (including Abstract) are to conform the Specification and Abstract to U.S. Patent and Trademark Office rules or to correct informalities. As required by 37 C.F.R. § 1.121(b)(3)(iii) and § 1.125(b)(2), a Marked Up Version Of The Substitute Specification comparing the Specification of record and the Substitute Specification also accompanies this Preliminary Amendment. Approval and entry of the Substitute Specification (including Abstract) are respectfully requested.

The underlying PCT Application No. PCT/DE00/03422 includes an International Search Report, dated February 8, 2001, a copy of which is submitted herewith.

Applicant asserts that the subject matter of the present application is new, non-obvious, and useful. Prompt consideration and allowance of the application are respectfully requested.

Respectfully Submitted,

KENYON & KENYON

By: Richard L. Mayer (Reg. No. 41,122)

Dated: 5/29/01

By: Richard L. Mayer
Richard L. Mayer
(Reg. No. 22,490)

One Broadway
New York, NY 10004
(212) 425-7200

FUEL INJECTOR

Field Of The Invention

The present invention relates to a fuel injector.

Background Information

German Published Patent Application No. 33 14 899 describes an electromagnetically actuatable fuel injector, in which an armature cooperates with an electrically excitable solenoid coil for the purpose of electromagnetic actuation, and the stroke of the armature is transmitted via a valve needle to a valve-closure member. The valve-closure member cooperates with a valve seat. The armature is not fixedly mounted on the valve needle but rather the armature is arranged so as to be axially movable with respect to the valve needle. A first resetting spring acts upon the valve needle in the closing direction and therefore keeps the fuel injector closed in the currentless, non-excited state of the solenoid coil. The armature, via a second resetting spring, is acted upon in the stroke direction such that the armature, in the resting position, contacts a first limit stop that is provided on the valve needle. When the solenoid coil is excited, the armature is pulled in the stroke direction and, as a result of the first limit stop, takes the valve needle with it. When the current exciting the solenoid coil is switched off, the valve needle is accelerated into its closed position by the first resetting spring, taking the armature with it as a result of the above-mentioned limit stop. As soon as the valve-closure member strikes against the valve seat, the closing motion of the valve needle is abruptly ended. The armature, which is not fixedly joined to the valve needle, continues to move in the stroke direction and the motion is absorbed by the second resetting spring, i.e., the armature swings through against a second resetting spring, which has a significantly lower spring constant than the first resetting spring. Finally, the second resetting spring accelerates the armature once again in the stroke direction. If the armature strikes against the limit stop of the valve needle, the can result in the valve-closure member, which is connected to the valve needle, once again briefly lifting off from the valve seat, therefore generating a short-term opening of the fuel injector. The debouncing in the fuel injector

known from German Published Patent Application No. 33 14 899 is therefore imperfect. In addition, it is disadvantageous both in a conventional fuel injector, in which the armature is fixedly connected to the valve needle, as well as in the fuel injector known from German Published Patent Application No. 33 14 899, that the opening stroke of the valve needle begins immediately as soon as the magnetic force exerted by the solenoid coil on the armature exceeds the sum of the forces acting in the closing direction, i.e., the spring closing force exerted by the first resetting spring and the hydraulic forces of the fuel, which is under pressure. This is disadvantageous to the extent that, when the current exciting the solenoid coil is switched on, the magnetic force has not yet reached its final value due to the self-induction of the solenoid coil and the eddy currents that arise. At the beginning of the opening stroke, the valve needle and the valve-closure member are therefore accelerated at a reduced force. This leads to an opening time that is not satisfactory for all application cases.

In U.S. Patent No. 5,299,776, it is proposed, in this regard, not to connect the armature fixedly to the valve needle but rather to allow the armature a certain axial freedom of motion on the valve needle. However, in this embodiment, the axial position of the armature, in the resting position of the fuel injector, is not defined, and therefore, in the fuel injector known from this publication, the response time is uncertain when the exciting current is switched on.

Summary Of The Invention

In contrast, the fuel injector according to the present invention has the advantage that the fuel injector is debounced in a satisfactory manner and, additionally, that it has an extremely small opening time. Because of the immediate limit stop on the connecting part, an adjusting or guide disk can be dispensed with. The enlarged guide diameter generates improved guide properties, i.e., the valve needle is less sensitive to tilting or jamming. As a result of the fact that the guide is closer on the armature, the moments are reduced.

As a result of the fact that the second resetting spring holds the armature in the resting position of the fuel injector not at the first limit stop provided on the valve needle but at a stationary second limit stop at a distance from the first limit stop of the valve needle, it is achieved, when the fuel injector is closed, that the armature is not accelerated once again in

the stroke direction by the second resetting spring. When the fuel injector is closed, the motion of the valve needle is abruptly ended if the valve-closure member comes into contact with the valve seat, as a result of the acceleration by the first resetting spring. In the fuel injector according to the present invention, the motion of the armature also continues in the closing direction, i.e., contrary to the stroke direction, until the armature has reached the second limit stop. If the armature rebounds from the second limit stop, it is nevertheless once again accelerated by the second resetting spring, contrary to the stroke direction, and the armature is prevented once again from reaching the first limit stop on the valve needle and therefore from carrying the valve needle with it in the opening direction. As a result of the second resetting spring, the armature is held at a distance from the first limit stop provided on the valve needle until the armature is once again accelerated in the stroke direction by the solenoid coil as a consequence of the next current pulse exciting the solenoid coil.

A further advantage of the fuel injector lies in the fact that the armature initially experiences a preacceleration before reaching the first limit stop provided on the valve needle, i.e., before carrying the valve needle with it. In this manner, the armature received an impulse, which it transmits to the valve needle, even before carrying the valve needle with it. In comparison to a fuel injector in which the armature is fixedly connected to the valve needle or a fuel injector in which the armature is movable with respect to the valve needle but in the resting position contacts the limit stop of the valve needle, a substantially shorter opening time and therefore a more precise metering of the fuel is achieved. A further effect that shortens the opening time arises from the fact that the magnetic force exerted on the armature is initially reduced when the current pulse exciting the solenoid coil is switched on, due to the self-induction of the solenoid coil and the eddy currents excited by the solenoid coil. If the distance is appropriately dimensioned between the second limit stop, at which the armature is positioned in its resting position, and the first limit stop, which acts to carry the valve needle with it, it can therefore be achieved that, when the armature strikes the first limit stop of the valve needle, so much time has already passed that the magnetic force has reached its final constant value. Therefore, as a result of the added flight time of the armature, a time delay is achieved which significantly shortens the subsequent opening time of the fuel injector.

In the connecting part executed as the valve seat support, it is possible to integrate both an

armature guide as well as a second limit stop. In this context, however, in a first peripheral area, the valve seat support having the armature guide can be configured not having the second limit stop, and in a second peripheral area, it can be configured as having the second limit stop but not having the anchor guide. As a result of the functional separation of limit stop and anchor guide, the requirements with respect to manufacturing precision are less stringent.

To prevent a magnetic short-circuit, the magnetic restricter is preferably arranged in the area between the second limit stop and a valve needle shaft of the valve needle. The magnetic restricter can be arranged either on the valve seat support or on the armature. In the arrangement on the armature, the magnetic restricter is preferably located on the periphery of a segment aligned with the valve needle.

Brief Description Of The Drawings

Figure 1 depicts a fuel injector according to the related art in a cutaway representation.

Figure 2 depicts a section of a cutaway representation of a fuel injector based on the fundamental kinematic principle underlying the present invention, but not having all of the features of the present invention.

Figure 3 depicts an enlarged representation of section III in Figure 2.

Figure 4 depicts a section of a cutaway representation of a first exemplary embodiments of a fuel injector according to the present invention.

Figure 5 depicts section V in Figure 4.

Figure 6 depicts a section of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector according to the present invention.

Figure 7 depicts a section of a cutaway representation of a detail of a third and fourth

exemplary embodiment of a fuel injector according to the present invention.

Detailed Description

Before three exemplary embodiments of a fuel injector equipped in accordance with the present invention are described in greater detail on the basis of Figures 4, 5, 6, and 7, an already known fuel injector will first be briefly explained on the basis of Figure 1 with respect to its essential components, for the purpose of improved comprehension, and then, on the basis of Figures 2 and 3, the fundamental kinematic base principle underlying the present invention will be briefly explained.

The fuel injector generally designated as reference numeral 1 has a fuel intake pipe 2, which can be connected via a thread 4 to a fuel line in a generally known manner. Fuel injector 1 is executed in the shape of an injector for fuel injection systems of mixture-compressing, spark-ignition internal combustion engines. Fuel injector 1 is particularly suited for the direct injection of fuel into an undepicted combustion chamber of an internal combustion engine. Via a fuel filter 3, the fuel enters a longitudinal bore hole 6 configured in a core 5. Core 5 has an external thread segment 7, which is screwed to fuel intake pipe 2.

Core 5 at its downstream end 10 is surrounded by solenoid coil 8, which is wound on a coil holder 9. Located downstream of downstream end 10 of core 5 is an armature 11, which is separated from end 10 of core 5 by a slight gap. Armature 11 has bore holes 12 for the passage of the fuel. Armature 11 is also fixedly connected to a valve needle 13, e.g., by welding. At the end opposite armature 11, valve needle 13 has a valve-closure member 14, which cooperates with a valve seat 15 configured on a valve seat support 16. In the example depicted in Figure 1, valve seat support 16 is inserted into a housing body 17 and is sealed by a sealing ring 18.

Housing body 17 can be screwed using a thread 19, e.g., into an undepicted cylinder head of an internal combustion engine. When fuel injector 1 is opened, fuel is injected via at least one spray-discharge opening 20, configured on the downstream end of valve seat support 16, into the also undepicted combustion chamber of the internal combustion engine. Functioning to

improve the distribution of the fuel are, e.g., a plurality of peripherally disposed swirl grooves 21 on valve-closure member 14. Functioning to seal off valve seat support 16 in the bore holes of the cylinder head is a gasket seal 22. Valve needle 13 is guided on guide surfaces 24 in a longitudinal bore hole 23 of valve seat support 16. Between guide surfaces 24 there are flattened-off areas 25, to make possible the unimpeded passage of the fuel.

To open fuel injector 1, solenoid coil 8 is excited by an electrical excitation current, which is supplied via an electrical connecting cable 26. In the resting state of fuel injector 1, armature 11 is acted upon by a first resetting spring 27 contrary to its stroke direction, so that valve-closure member 14 on valve seat 15 is held in the sealing position. When solenoid coil 8 is excited, armature 11 is pulled in the stroke direction toward core 5, the stroke being indicated by the gap existing, in the resting position, between core 5 and armature 11. Valve needle 13, fixedly connected to armature 11, and valve-closure member 14 are carried along in the stroke direction so that valve-closure member 14 releases spray-discharge opening 20.

When the excitation current is switched off, armature 11, valve needle 13, which is fixedly connected to armature 11, and valve-closure member 14 are accelerated by first resetting spring 27 in the closing direction contrary to the stroke direction. If valve-closure member 14 strikes against valve seat 15, the result, due to the elasticity of valve needle 13 and due to the mass of armature 11, which is fixedly connected to valve needle 13, can be a rebound of valve-closure member 14 from valve seat 15. This is highly undesirable because this effect can lead to a renewed short-term opening of fuel injector 1, falsifying both the metering time as well as the metering quantity.

When known fuel injector 1, depicted in Figure 1, is opened, the disadvantage exists that the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, acts on armature 11 and valve needle 13, which is fixedly joined to armature 11. This is unfavorable inasmuch as the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, does not immediately reach its final value due to the self-induction of solenoid coil 8 and due to the eddy currents induced by solenoid coil 8. Therefore, in the initial phase of the opening stroke, a reduced magnetic force is initially exerted on armature 11, which for many application cases leads to an undesirably long

opening time.

The embodiment depicted in Figures 2 and 3 functions so as to overcome these disadvantages. Figure 2 depicts a segment in an enlarged, cutaway representation. In this context, in an enlarged view, only those components are shown which are of major importance for the present invention. The configuration of the remaining components can be identical to a known fuel injector 1, in particular a fuel injector 1 depicted in Figure 1. To facilitate comprehension, the elements in Figure 2 already described on the basis of Figure 1 are identified with corresponding reference numerals. In Figure 3, segment III in Figure 2 is depicted in a representation that is also significantly enlarged with respect to Figure 2.

At the end opposite valve-closure member 14, valve needle 13 has a flange 30, which in the depicted example has the shape of a stepped cylinder 37. Armature 11 is not fixedly joined to valve needle 13, but rather is axially movable within preestablished limits with regard to valve needle 13. Valve needle 13, i.e., in the depicted example, flange 30 of valve needle 13, has a first limit stop 32 for armature 11. First limit stop 32 in the depicted example is provided on a first step 31 of flange 30, which is configured as a stepped cylinder 37. A second limit stop 33 is provided on a housing-mounted, stationary adjusting disk 34, which is configured in the example so as to be annular or partially annular, the adjusting disk being able to be inserted into housing body 17. Adjusting disk 34 can be restrained, e.g., by being jammed into place. In addition, it is possible to secure adjusting disk 34 on housing body 17 by a welded seam 35. For axially positioning adjusting disk 34, housing body 17 can have a stepped projection 36. Adjusting disk 34, in this context, when introduced into housing body 17, is inserted until it contacts projection 36 of housing body 17.

In Figures 2 and 3, the resting position of fuel injector 1 is depicted, there being no electrical excitation of solenoid coil 8. As can be seen from his Figure, the distance between first limit stop 32 on flange 30 of valve needle 13 and second, stationary limit stop 33 is dimensioned so that, in the resting state of fuel injector 1, a gap 39 arises between first limit stop 32 and end face 38 of armature 11, opposite first limit stop 32. Armature 11 in the depicted resting state is held in position at second limit stop 33 of stationary adjusting disk 34 by a second resetting spring 40. Second resetting spring 40 is positioned between a first step 41 of flange

30, which is configured as a stepped cylinder 37, and end face 38 of armature 11, opposite first limit stop 32. On second step 41 of stepped cylinder 37, first resetting spring 27 is also supported at an end face 44, located opposite, the first resetting spring also contacting valve needle 13 via flange 30 and biasing valve needle 13 in the closing direction. As can be seen both from Figure 2 as well as from Figure 3, a second gap 42 exists between downstream end 10 of core 5 and upper end face 38 of armature 11, the second gap being larger dimensioned in the axial direction than first gap 39, which is provided between first limit stop 32 and end face 38 of armature 11.

The mode of functioning of the fuel injector is as follows:

When the fuel injector is opened, after solenoid coil 8 is excited, initially only armature 11 is accelerated in the stroke direction towards second resetting spring 40, at first without carrying with it valve needle 13 and valve-closure member 14, which is connected to valve needle 13. Armature 11, due to the preacceleration, strikes first limit stop 32 so as to have a significant impulse, and carries valve needle 13 and valve-closure member 14 with it. Due to the preacceleration and the impulse of armature 11, a relatively sweeping opening motion is achieved after armature 11 strikes first limit stop 32. In addition, the flight time of armature 11 before striking first limit stop 32 has the advantage that, if the distance between first stop 32 and second limit stop 33 is correctly dimensioned, a delay time is achieved of sufficient length for the magnetic force in the meantime to reach its full intensity. As was already described, in the initial phase of the excitement of solenoid coil 8, the magnetic force generated by solenoid coil 8 is reduced due to the self-induction of solenoid coil 8 and the induced eddy currents. The acceleration of valve needle 13 and of valve-closure member 14 is then achieved at full, not reduced, magnetic force, which also contributes to a short opening time. After reaching first limit stop 32, armature 11, together with valve needle 13 and valve-closure member 14, is accelerated in the stroke direction until end face 38 of armature 11 reaches the downstream end face of end 10 of core 5. First gap 39 therefore determines the preacceleration of armature 11, whereas second gap 42 defines the opening stroke of fuel injector 1.

When fuel injector 1 is closed, armature 11, valve needle 13, and valve-closure member 14

initially move synchronously in the closing direction. As soon as valve-closure member 14 reaches valve seat 15, the motion of valve-closure member 14 and of valve needle 13 is abruptly ended, whereas armature 11 continues to move in the closing direction until armature 11 strikes second limit stop 33. Even if armature 11 rebounds from second limit stop 33, this does not have any negative effect on the opening behavior of fuel injector 1, because second resetting spring 40 prevents armature 11 from once again reaching first limit stop 32. Therefore, valve needle 13 and valve-closure member 14 are prevented from once again being carried along. Finally, armature 11 is held in position at second limit stop 33 by second resetting spring 40, until a new current pulse brings about a new opening of fuel injector 1 by exciting solenoid coil 8.

Therefore, as a result of this measure, both an effective debouncing as well as a relatively short opening time of fuel injector 1 are achieved.

Figure 4 depicts a first exemplary embodiment of a fuel injector according to the present invention, in one segment of a cutaway representation. Here too, elements that have already been described are identified with the corresponding reference numerals.

In contrast to the embodiment described on the basis of Figures 2 and 3, in the exemplary embodiment according to the present dimension, no adjusting disk 34 is provided. Instead, second limit stop 33 is configured directly on intake-side end face 50 of the connecting part that is configured as valve seat support 16. In the exemplary embodiment depicted in Figure 4, valve seat support 16 is made of a magnetic, in particular, ferritic material. In this context, what is avoided is that a significant magnetic flux flows from armature 11 into valve seat support 16 and then further directly into housing body 17, which closes the magnetic circuit as external pole 59, because this brings about a counterforce acting on armature 11 in the direction contrary to opening, thus reducing the magnetic opening force that is effectively exerted upon armature 11. Rather, care is taken that the main magnetic flux flows directly from armature 11 into housing body 17, circumventing valve seat support 16. For this purpose, a magnetic restricter 56 is provided on valve seat support 16 directly in the fuel flow direction underneath end face 50 forming second limit stop 33, the restricter being formed by an annular groove 51. As a result of the constriction of the material of valve seat support 16

in the area of restricter 56, the magnetic flux at this location is weakened, so that the main flux overflows directly from armature 11 into housing body 17, i.e., in the reverse direction. A casing 52 is disposed between housing body 17 and armature 11 and valve seat support 16.

Figure 5 depicts the segment designated in Figure 4 as V and clarifies the circumstances described above. It can be seen that secondary magnetic flux 53, which runs from housing body 17, acting as external magnetic pole 59, via valve seat support 16 to armature 11, is significantly weakened in comparison to main magnetic flux 58, which runs from housing body 17 directly to armature 11.

Figure 6 depicts a segment of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector 1 according to the present invention.

The exemplary embodiment depicted in Figure 6 is distinguished from the exemplary embodiment already described on the basis of Figures 4 and 5 by fact that valve seat support 16 is made of a nonmagnetic material, for example, a ceramic material or a plastic material. Because valve seat support 16 in this exemplary embodiment is made of a nonmagnetic material, no secondary magnetic flux is generated via valve seat support 16, so that restricter 56 can be dispensed with.

Figure 7 depicts a detail of a third and fourth exemplary embodiment of a fuel injector 1 according to the present invention, also in a segment view of a cutaway representation. In this context, in the left half of Figure 7, a third exemplary embodiment is depicted, and in the right half of Figure 7, a fourth exemplary embodiment. In the third exemplary embodiment, depicted in the left half of Figure 7, valve seat support 16 takes over only the function of guiding armature 11 but not the function of the armature limit stop. For this purpose, on valve seat support 16, an armature guide 57 is provided, which cooperates with an armature shaft 60, which extends axially in the spray-discharge direction from an armature main body 61. Armature guide 57 is executed on the basis of reduced material strength, so that in this area a magnetic restricter 56 results. Because armature 11 strikes not against valve seat support 16 but rather against another component not depicted in Figure 7, an axial gap 63 exists between armature guide 57 and end face 43 of armature 11, configured on main armature body 61.

This axial gap 63 creates additional magnetic insulation of armature 11 from valve seat support 16, which in this exemplary embodiment can be made of a magnetic, i.e., ferritic, material.

- 5 In the fourth exemplary embodiment of a fuel injector 1 according to the present invention, depicted in the right half of Figure 7, armature 11 does indeed strike against intake-side end face 50 of valve seat support 16. However, in this exemplary embodiment, valve seat support 16 does not take on the function of guiding armature 11, but rather only of providing the limit stop. Armature 11 can be guided, for example, in the casing 52. A radial gap 62 is formed between valve seat support 16 and armature shaft 60, which extends from main armature body 61. Because in this exemplary embodiment there is no magnetic restricter 56, valve seat support 16 is advantageously made of a nonmagnetic material, for example a ceramic material.

Abstract Of The Disclosure

A fuel injector for fuel injection systems of internal combustion engines, in particular for directly injecting fuel into the combustion chamber of an internal combustion engine, has a solenoid coil, an armature that can be acted upon by the solenoid coil in a stroke direction in opposition to a first resetting spring, and a valve needle connected to a valve-closure member. The valve needle has a first limit stop for the movable armature, the armature additionally being acted upon by a second resetting spring. In addition, a stationary second limit stop is provided for the armature. The second resetting spring acts upon the armature contrary to the stroke direction and, in the resting position, when the solenoid coil is not excited, the second resetting spring holds the armature in position at the second limit stop such that the armature is at a preestablished distance from the first limit stop, which is configured on the valve needle. A connecting part can be made of a magnetic material and can be configured as having a magnetic restrictor, or it can be made of a nonmagnetic material.

FUEL INJECTOR

Field Of The Invention

The present invention [is based on] relates to a fuel injector.[according to the species of Claims 1 and 2]

Background Information

[From German Laid-Open Print] German Published Patent Application No. 33 14 899 describes [,] an electromagnetically actuatable fuel injector [is known], in which an armature cooperates with an electrically excitable solenoid coil for the purpose of electromagnetic actuation, and the stroke of the armature is transmitted via a valve needle to a valve-closure member. The valve-closure member cooperates with a valve seat. The armature is not fixedly mounted on the valve needle but rather the armature is arranged so as to be axially movable with respect to the valve needle. A first resetting spring acts upon the valve needle in the closing direction and therefore keeps the fuel injector closed in the currentless, non-excited state of the solenoid coil. The armature, via a second resetting spring, is acted upon in the stroke direction such that the armature, in the resting position, contacts a first limit stop that is provided on the valve needle. When the solenoid coil is excited, the armature is pulled in the stroke direction and, as a result of the first limit stop, takes the valve needle with it. When the current exciting the solenoid coil is switched off, the valve needle is accelerated into its closed position by the first resetting spring, taking the armature with it as a result of the above-mentioned limit stop. As soon as the valve-closure member strikes against the valve seat, the closing motion of the valve needle is abruptly ended. The armature, which is not fixedly joined to the valve needle, continues to move in the stroke direction and the motion is absorbed by the second resetting spring, i.e., the armature swings through against a second resetting spring, which has a significantly lower spring constant than the first resetting spring. Finally, the second resetting spring accelerates the armature once again in the stroke direction. If the armature strikes against the limit stop of the valve needle, the can result in the valve-closure member, which is connected to the valve needle, once again briefly lifting off

from the valve seat, therefore generating a short-term opening of the fuel injector. The debouncing in the fuel injector known from German [Laid-Open Print] Published Patent Application No. 33 14 899 is therefore imperfect. In addition, it is disadvantageous both in a conventional fuel injector, in which the armature is fixedly connected to the valve needle, as well as in the fuel injector known from German [Laid-Open Print] Published Patent Application No. 33 14 899, that the opening stroke of the valve needle begins immediately as soon as the magnetic force exerted by the solenoid coil on the armature exceeds the sum of the forces acting in the closing direction, i.e., the spring closing force exerted by the first resetting spring and the hydraulic forces of the fuel, which is under pressure. This is disadvantageous to the extent that, when the current exciting the solenoid coil is switched on, the magnetic force has not yet reached its final value due to the self-induction of the solenoid coil and the eddy currents that arise. At the beginning of the opening stroke, the valve needle and the valve-closure member are therefore accelerated at a reduced force. This leads to an opening time that is not satisfactory for all application cases.

In U.S. Patent No. 5,299,776, it is proposed, in this regard, not to connect the armature fixedly to the valve needle but rather to allow the armature a certain axial freedom of motion on the valve needle. However, in this embodiment, the axial position of the armature, in the resting position of the fuel injector, is not defined, and therefore, in the fuel injector known from this publication, the response time is uncertain when the exciting current is switched on.

[Advantages of the] Summary Of The Invention

In contrast, the fuel injector according to the present invention [having the characterizing features of Claim 1 or 2] has the advantage that the fuel injector is debounced in a satisfactory manner and, additionally, that it has an extremely small opening time. Because of the immediate limit stop on the connecting part, an adjusting or guide disk can be dispensed with. The enlarged guide diameter generates improved guide properties, i.e., the valve needle is less sensitive to tilting or jamming. As a result of the fact that the guide is closer on the armature, the moments are reduced.

As a result of the fact that the second resetting spring holds the armature in the resting

position of the fuel injector not at the first limit stop provided on the valve needle but at a stationary second limit stop at a distance from the first limit stop of the valve needle, it is achieved, when the fuel injector is closed, that the armature is not accelerated once again in the stroke direction by the second resetting spring. When the fuel injector is closed, the motion of the valve needle is abruptly ended if the valve-closure member comes into contact with the valve seat, as a result of the acceleration by the first resetting spring. In the fuel injector according to the present invention, the motion of the armature also continues in the closing direction, i.e., contrary to the stroke direction, until the armature has reached the second limit stop. If the armature rebounds from the second limit stop, it is nevertheless once again accelerated by the second resetting spring, contrary to the stroke direction, and the armature is prevented once again from reaching the first limit stop on the valve needle and therefore from carrying the valve needle with it in the opening direction. As a result of the second resetting spring, the armature is held at a distance from the first limit stop provided on the valve needle until the armature is once again accelerated in the stroke direction by the solenoid coil as a consequence of the next current pulse exciting the solenoid coil.

A further advantage of the fuel injector lies in the fact that the armature initially experiences a preacceleration before reaching the first limit stop provided on the valve needle, i.e., before carrying the valve needle with it. In this manner, the armature received an impulse, which it transmits to the valve needle, even before carrying the valve needle with it. In comparison to a fuel injector in which the armature is fixedly connected to the valve needle or a fuel injector in which the armature is movable with respect to the valve needle but in the resting position contacts the limit stop of the valve needle, a substantially shorter opening time and therefore a more precise metering of the fuel is achieved. A further effect that shortens the opening time arises from the fact that the magnetic force exerted on the armature is initially reduced when the current pulse exciting the solenoid coil is switched on, due to the self-induction of the solenoid coil and the eddy currents excited by the solenoid coil. If the distance is appropriately dimensioned between the second limit stop, at which the armature is positioned in its resting position, and the first limit stop, which acts to carry the valve needle with it, it can therefore be achieved that, when the armature strikes the first limit stop of the valve needle, so much time has already passed that the magnetic force has reached its final constant value. Therefore, as a result of the added flight time of the armature, a time delay is achieved

which significantly shortens the subsequent opening time of the fuel injector.

[As a result of the measures indicated in the subclaims, advantageous refinements and improvements of the fuel injector indicated in Claims 1 and 2 are possible.]

In the connecting part executed as the valve seat support, it is possible to integrate both an armature guide as well as a second limit stop. In this context, however, in a first peripheral area, the valve seat support having the armature guide can be configured not having the second limit stop, and in a second peripheral area, it can be configured as having the second limit stop but not having the anchor guide. As a result of the functional separation of limit stop and anchor guide, the requirements with respect to manufacturing precision are less stringent.

To prevent a magnetic short-circuit, the magnetic restricter is preferably arranged in the area between the second limit stop and a valve needle shaft of the valve needle. The magnetic restricter can be arranged either on the valve seat support or on the armature. In the arrangement on the armature, the magnetic restricter is preferably located on the periphery of a segment aligned with the valve needle.

[Drawing

Exemplary embodiments of the present invention are depicted in simplified form in the drawing and are discussed in greater detail in the following description. The following are the contents:] Brief Description Of The Drawings

Figure 1 depicts a fuel injector according to the related art in a cutaway representation[;].

Figure 2 depicts a section of a cutaway representation of a fuel injector based on the fundamental kinematic principle underlying the present invention, but not having all of the features of the present invention[;].

Figure 3 depicts an enlarged representation of section III in Figure 2[;].

Figure 4 depicts a section of a cutaway representation of a first exemplary embodiment of a fuel injector according to the present invention[;].

Figure 5 depicts section V in Figure 4[;].

Figure 6 depicts a section of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector according to the present invention.

Figure 7 depicts a section of a cutaway representation of a detail of a third and fourth exemplary embodiment of a fuel injector according to the present invention.

Detailed Description [of the Exemplary Embodiments]

Before three exemplary embodiments of a fuel injector equipped in accordance with the present invention are described in greater detail on the basis of Figures 4, 5, 6, and 7, an already known fuel injector will first be briefly explained on the basis of Figure 1 with respect to its essential components, for the purpose of improved comprehension, and then, on the basis of Figures 2 and 3, the fundamental kinematic base principle underlying the present invention will be briefly explained.

The fuel injector generally designated as reference numeral 1 has a fuel intake pipe 2, which can be connected via a thread 4 to a fuel line in a generally known manner. Fuel injector 1 is executed in the shape of an injector for fuel injection systems of mixture-compressing, spark-ignition internal combustion engines. Fuel injector 1 is particularly suited for the direct injection of fuel into an undepicted combustion chamber of an internal combustion engine. Via a fuel filter 3, the fuel enters a longitudinal bore hole 6 configured in a core 5. Core 5 has an external thread segment 7, which is screwed to fuel intake pipe 2.

Core 5 at its downstream end 10 is surrounded by solenoid coil 8, which is wound on a coil holder 9. Located downstream of downstream end 10 of core 5 is an armature 11, which is separated from end 10 of core 5 by a slight gap. Armature 11 has bore holes 12 for the passage of the fuel. Armature 11 is also fixedly connected to a valve needle 13, e.g., by

welding. At the end opposite armature 11, valve needle 13 has a valve-closure member 14, which cooperates with a valve seat 15 configured on a valve seat support 16. In the example depicted in Figure 1, valve seat support 16 is inserted into a housing body 17 and is sealed by a sealing ring 18.

Housing body 17 can be screwed using a thread 19, e.g., into an undepicted cylinder head of an internal combustion engine. When fuel injector 1 is opened, fuel is injected via at least one spray-discharge opening 20, configured on the downstream end of valve seat support 16, into the also undepicted combustion chamber of the internal combustion engine. Functioning to improve the distribution of the fuel are, e.g., a plurality of peripherally disposed swirl grooves 21 on valve-closure member 14. Functioning to seal off valve seat support 16 in the bore holes of the cylinder head is a gasket seal 22. Valve needle 13 is guided on guide surfaces 24 in a longitudinal bore hole 23 of valve seat support 16. Between guide surfaces 24 there are flattened-off areas 25, to make possible the unimpeded passage of the fuel.

To open fuel injector 1, solenoid coil 8 is excited by an electrical excitation current, which is supplied via an electrical connecting cable 26. In the resting state of fuel injector 1, armature 11 is acted upon by a first resetting spring 27 contrary to its stroke direction, so that valve-closure member 14 on valve seat 15 is held in the sealing position. When solenoid coil 8 is excited, armature 11 is pulled in the stroke direction toward core 5, the stroke being indicated by the gap existing, in the resting position, between core 5 and armature 11. Valve needle 13, fixedly connected to armature 11, and valve-closure member 14 are carried along in the stroke direction so that valve-closure member 14 releases spray-discharge opening 20.

When the excitation current is switched off, armature 11, valve needle 13, which is fixedly connected to armature 11, and valve-closure member 14 are accelerated by first resetting spring 27 in the closing direction contrary to the stroke direction. If valve-closure member 14 strikes against valve seat 15, the result, due to the elasticity of valve needle 13 and due to the mass of armature 11, which is fixedly connected to valve needle 13, can be a rebound of valve-closure member 14 from valve seat 15. This is highly undesirable because this effect can lead to a renewed short-term opening of fuel injector 1, falsifying both the metering time as well as the metering quantity.

When known fuel injector 1, depicted in Figure 1, is opened, the disadvantage exists that the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, acts on armature 11 and valve needle 13, which is fixedly joined to armature 11. This is unfavorable inasmuch as the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, does not immediately reach its final value due to the self-induction of solenoid coil 8 and due to the eddy currents induced by solenoid coil 8. Therefore, in the initial phase of the opening stroke, a reduced magnetic force is initially exerted on armature 11, which for many application cases leads to an undesirably long opening time.

The embodiment depicted in Figures 2 and 3 functions so as to overcome these disadvantages. Figure 2 depicts a segment in an enlarged, cutaway representation. In this context, in an enlarged view, only those components are shown which are of major importance for the present invention. The configuration of the remaining components can be identical to a known fuel injector 1, in particular a fuel injector 1 depicted in Figure 1. To facilitate comprehension, the elements in Figure 2 already described on the basis of Figure 1 are identified with corresponding reference numerals. In Figure 3, segment III in Figure 2 is depicted in a representation that is also significantly enlarged with respect to Figure 2.

At the end opposite valve-closure member 14, valve needle 13 has a flange 30, which in the depicted example has the shape of a stepped cylinder 37. Armature 11 is not fixedly joined to valve needle 13, but rather is axially movable within preestablished limits with regard to valve needle 13. Valve needle 13, i.e., in the depicted example, flange 30 of valve needle 13, has a first limit stop 32 for armature 11. First limit stop 32 in the depicted example is provided on a first step 31 of flange 30, which is configured as a stepped cylinder 37. A second limit stop 33 is provided on a housing-mounted, stationary adjusting disk 34, which is configured in the example so as to be annular or partially annular, the adjusting disk being able to be inserted into housing body 17. Adjusting disk 34 can be restrained, e.g., by being jammed into place. In addition, it is possible to secure adjusting disk 34 on housing body 17 by a welded seam 35. For axially positioning adjusting disk 34, housing body 17 can have a stepped projection 36. Adjusting disk 34, in this context, when introduced into housing body 17, is inserted until it contacts projection 36 of housing body 17.

In Figures 2 and 3, the resting position of fuel injector 1 is depicted, there being no electrical excitation of solenoid coil 8. As can be seen from his Figure, the distance between first limit stop 32 on flange 30 of valve needle 13 and second, stationary limit stop 33 is dimensioned so that, in the resting state of fuel injector 1, a gap 39 arises between first limit stop 32 and end face 38 of armature 11, opposite first limit stop 32. Armature 11 in the depicted resting state is held in position at second limit stop 33 of stationary adjusting disk 34 by a second resetting spring 40. Second resetting spring 40 is positioned between a first step 41 of flange 30, which is configured as a stepped cylinder 37, and end face 38 of armature 11, opposite first limit stop 32. On second step 41 of stepped cylinder 37, first resetting spring 27 is also supported at an end face 44, located opposite, the first resetting spring also contacting valve needle 13 via flange 30 and biasing valve needle 13 in the closing direction. As can be seen both from Figure 2 as well as from Figure 3, a second gap 42 exists between downstream end 10 of core 5 and upper end face 38 of armature 11, the second gap being larger dimensioned in the axial direction than first gap 39, which is provided between first limit stop 32 and end face 38 of armature 11.

The mode of functioning of the fuel injector is as follows:

When the fuel injector is opened, after solenoid coil 8 is excited, initially only armature 11 is accelerated in the stroke direction towards second resetting spring 40, at first without carrying with it valve needle 13 and valve-closure member 14, which is connected to valve needle 13. Armature 11, due to the preacceleration, strikes first limit stop 32 so as to have a significant impulse, and carries valve needle 13 and valve-closure member 14 with it. Due to the preacceleration and the impulse of armature 11, a relatively sweeping opening motion is achieved after armature 11 strikes first limit stop 32. In addition, the flight time of armature 11 before striking first limit stop 32 has the advantage that, if the distance between first stop 32 and second limit stop 33 is correctly dimensioned, a delay time is achieved of sufficient length for the magnetic force in the meantime to reach its full intensity. As was already described, in the initial phase of the excitement of solenoid coil 8, the magnetic force generated by solenoid coil 8 is reduced due to the self-induction of solenoid coil 8 and the induced eddy currents. The acceleration of valve needle 13 and of valve-closure member 14 is then achieved at full, not reduced, magnetic force, which also contributes to a short opening

time. After reaching first limit stop 32, armature 11, together with valve needle 13 and valve-closure member 14, is accelerated in the stroke direction until end face 38 of armature 11 reaches the downstream end face of end 10 of core 5. First gap 39 therefore determines the preacceleration of armature 11, whereas second gap 42 defines the opening stroke of fuel injector 1.

When fuel injector 1 is closed, armature 11, valve needle 13, and valve-closure member 14 initially move synchronously in the closing direction. As soon as valve-closure member 14 reaches valve seat 15, the motion of valve-closure member 14 and of valve needle 13 is abruptly ended, whereas armature 11 continues to move in the closing direction until armature 11 strikes second limit stop 33. Even if armature 11 rebounds from second limit stop 33, this does not have any negative effect on the opening behavior of fuel injector 1, because second resetting spring 40 prevents armature 11 from once again reaching first limit stop 32. Therefore, valve needle 13 and valve-closure member 14 are prevented from once again being carried along. Finally, armature 11 is held in position at second limit stop 33 by second resetting spring 40, until a new current pulse brings about a new opening of fuel injector 1 by exciting solenoid coil 8.

Therefore, as a result of this measure, both an effective debouncing as well as a relatively short opening time of fuel injector 1 are achieved.

Figure 4 depicts a first exemplary embodiment of a fuel injector according to the present invention, in one segment of a cutaway representation. Here too, elements that have already been described are identified with the corresponding reference numerals.

In contrast to the embodiment described on the basis of Figures 2 and 3, in the exemplary embodiment according to the present dimension, no adjusting disk 34 is provided. Instead, second limit stop 33 is configured directly on intake-side end face 50 of the connecting part that is configured as valve seat support 16. In the exemplary embodiment depicted in Figure 4, valve seat support 16 is made of a magnetic, in particular, ferritic material. In this context, [it must be] what is avoided is that a significant magnetic flux flows from armature 11 into valve seat support 16 and then further directly into housing body 17, which closes the

depicted in the left half of Figure 7, valve seat support 16 takes over only the function of guiding armature 11 but not the function of the armature limit stop. For this purpose, on valve seat support 16, an armature guide 57 is provided, which cooperates with an armature shaft 60, which extends axially in the spray-discharge direction from an armature main body 61.

Armature guide 57 is executed on the basis of reduced material strength, so that in this area a magnetic restricter 56 results. Because armature 11 strikes not against valve seat support 16 but rather against another component not depicted in Figure 7, an axial gap 63 exists between armature guide 57 and end face 43 of armature 11, configured on main armature body 61.

This axial gap 63 creates additional magnetic insulation of armature 11 from valve seat support 16, which in this exemplary embodiment can be made of a magnetic, i.e., ferritic, material.

In the fourth exemplary embodiment of a fuel injector 1 according to the present invention, depicted in the right half of Figure 7, armature 11 does indeed strike against intake-side end face 50 of valve seat support 16. However, in this exemplary embodiment, valve seat support 16 does not take on the function of guiding armature 11, but rather only of providing the limit stop. Armature 11 can be guided, for example, in the casing 52. A radial gap 62 is formed between valve seat support 16 and armature shaft 60, which extends from main armature body 61. Because in this exemplary embodiment there is no magnetic restricter 56, valve seat support 16 is advantageously made of a nonmagnetic material, for example a ceramic material.

Abstract Of The Disclosure

10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500 505 510 515 520 525 530 535 540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625 630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715 720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805 810 815 820 825 830 835 840 845 850 855 860 865 870 875 880 885 890 895 900 905 910 915 920 925 930 935 940 945 950 955 960 965 970 975 980 985 990 995

A fuel injector [(1)] for fuel injection systems of internal combustion engines, in particular for directly injecting fuel into the combustion chamber of an internal combustion engine, has a solenoid coil[(8)], an armature [(11)] that can be acted upon by the solenoid coil [(8)] in a stroke direction in opposition to a first resetting spring[(27)], and a valve needle [(13)] connected to a valve-closure member[(14)]. The valve needle [(13)] has a first limit stop [(32)] for the movable armature[(11)], the armature [(11)] additionally being acted upon by a second resetting spring[(40)]. In addition, a stationary second limit stop [(33)] is provided for the armature[(11)]. The second resetting spring [(40)] acts upon the armature [(11)] contrary to the stroke direction and, in the resting position, when the solenoid coil [(8)] is not excited, the second resetting spring holds the armature [(11)] in position at the second limit stop [(33)] such that the armature [(11)] is at a preestablished distance from the first limit stop[(32)], which is configured on the valve needle[(13)]. A connecting part [(16)] can be made of a magnetic material and can be configured as having a magnetic restricter[(56)], or it can be made of a nonmagnetic material.

[(Figure 4)]

5/PR7S

09/856906

JC18 Rec'd PCT/PTO 2 9 MAY 2001

[10191/1883]

FUEL INJECTOR

Background Information

The present invention is based on a fuel injector according to the species of Claims 1 and 2.

From German Laid-Open Print 33 14 899, an electromagnetically actuatable fuel injector is known, in which an armature cooperates with an electrically excitable solenoid coil for the purpose of electromagnetic actuation, and the stroke of the armature is transmitted via a valve needle to a valve-closure member. The valve-closure member cooperates with a valve seat. The armature is not fixedly mounted on the valve needle but rather the armature is arranged so as to be axially movable with respect to the valve needle. A first resetting spring acts upon the valve needle in the closing direction and therefore keeps the fuel injector closed in the currentless, non-excited state of the solenoid coil. The armature, via a second resetting spring, is acted upon in the stroke direction such that the armature, in the resting position, contacts a first limit stop that is provided on the valve needle. When the solenoid coil is excited, the armature is pulled in the stroke direction and, as a result of the first limit stop, takes the valve needle with it. When the current exciting the solenoid coil is switched off, the valve needle is accelerated into its closed position by the first resetting spring, taking the armature with it as a result of the above-mentioned limit stop. As soon as the valve-closure member strikes against the valve seat, the closing motion of the valve needle is abruptly ended. The armature, which is not fixedly joined to the valve needle, continues to move in the stroke direction and the motion is absorbed by the second resetting spring, i.e., the armature swings through against a second resetting spring, which has a significantly lower spring constant than the first resetting spring. Finally, the second resetting spring accelerates the armature once again in the stroke direction. If the armature strikes against the limit stop of the valve needle, the can result in the valve-closure member, which is connected to the valve needle, once again briefly lifting off from the valve seat, therefore generating a short-term opening of the fuel injector. The debouncing in the fuel injector known from German Laid-Open Print 33 14 899 is therefore imperfect. In addition, it is disadvantageous both in a conventional fuel injector, in which the armature is fixedly connected to the valve needle, as well as in the fuel injector known from German Laid-Open Print 33 14 899, that the opening stroke of the valve needle

begins immediately as soon as the magnetic force exerted by the solenoid coil on the armature exceeds the sum of the forces acting in the closing direction, i.e., the spring closing force exerted by the first resetting spring and the hydraulic forces of the fuel, which is under pressure. This is disadvantageous to the extent that, when the current exciting the solenoid coil is switched on, the magnetic force has not yet reached its final value due to the self-induction of the solenoid coil and the eddy currents that arise. At the beginning of the opening stroke, the valve needle and the valve-closure member are therefore accelerated at a reduced force. This leads to an opening time that is not satisfactory for all application cases.

In U.S. Patent 5,299,776, it is proposed, in this regard, not to connect the armature fixedly to the valve needle but rather to allow the armature a certain axial freedom of motion on the valve needle. However, in this embodiment, the axial position of the armature, in the resting position of the fuel injector, is not defined, and therefore, in the fuel injector known from this publication, the response time is uncertain when the exciting current is switched on.

Advantages of the Invention

In contrast, the fuel injector according to the present invention having the characterizing features of Claim 1 or 2 has the advantage that the fuel injector is debounced in a satisfactory manner and, additionally, that it has an extremely small opening time. Because of the immediate limit stop on the connecting part, an adjusting or guide disk can be dispensed with. The enlarged guide diameter generates improved guide properties, i.e., the valve needle is less sensitive to tilting or jamming. As a result of the fact that the guide is closer on the armature, the moments are reduced.

As a result of the fact that the second resetting spring holds the armature in the resting position of the fuel injector not at the first limit stop provided on the valve needle but at a stationary second limit stop at a distance from the first limit stop of the valve needle, it is achieved, when the fuel injector is closed, that the armature is not accelerated once again in the stroke direction by the second resetting spring. When the fuel injector is closed, the motion of the valve needle is abruptly ended if the valve-closure member comes into contact with the valve seat, as a result of the acceleration by the first resetting spring. In the fuel injector according to the present invention, the motion of the armature also continues in the

closing direction, i.e., contrary to the stroke direction, until the armature has reached the second limit stop. If the armature rebounds from the second limit stop, it is nevertheless once again accelerated by the second resetting spring, contrary to the stroke direction, and the armature is prevented once again from reaching the first limit stop on the valve needle and therefore from carrying the valve needle with it in the opening direction. As a result of the second resetting spring, the armature is held at a distance from the first limit stop provided on the valve needle until the armature is once again accelerated in the stroke direction by the solenoid coil as a consequence of the next current pulse exciting the solenoid coil.

A further advantage of the fuel injector lies in the fact that the armature initially experiences a preacceleration before reaching the first limit stop provided on the valve needle, i.e., before carrying the valve needle with it. In this manner, the armature received an impulse, which it transmits to the valve needle, even before carrying the valve needle with it. In comparison to a fuel injector in which the armature is fixedly connected to the valve needle or a fuel injector in which the armature is movable with respect to the valve needle but in the resting position contacts the limit stop of the valve needle, a substantially shorter opening time and therefore a more precise metering of the fuel is achieved. A further effect that shortens the opening time arises from the fact that the magnetic force exerted on the armature is initially reduced when the current pulse exciting the solenoid coil is switched on, due to the self-induction of the solenoid coil and the eddy currents excited by the solenoid coil. If the distance is appropriately dimensioned between the second limit stop, at which the armature is positioned in its resting position, and the first limit stop, which acts to carry the valve needle with it, it can therefore be achieved that, when the armature strikes the first limit stop of the valve needle, so much time has already passed that the magnetic force has reached its final constant value. Therefore, as a result of the added flight time of the armature, a time delay is achieved which significantly shortens the subsequent opening time of the fuel injector.

As a result of the measures indicated in the subclaims, advantageous refinements and improvements of the fuel injector indicated in Claims 1 and 2 are possible.

In the connecting part executed as the valve seat support, it is possible to integrate both an armature guide as well as a second limit stop. In this context, however, in a first peripheral area, the valve seat support having the armature guide can be configured not having the

second limit stop, and in a second peripheral area, it can be configured as having the second limit stop but not having the anchor guide. As a result of the functional separation of limit stop and anchor guide, the requirements with respect to manufacturing precision are less stringent.

To prevent a magnetic short-circuit, the magnetic restricter is preferably arranged in the area between the second limit stop and a valve needle shaft of the valve needle. The magnetic restricter can be arranged either on the valve seat support or on the armature. In the arrangement on the armature, the magnetic restricter is preferably located on the periphery of a segment aligned with the valve needle.

Drawing

Exemplary embodiments of the present invention are depicted in simplified form in the drawing and are discussed in greater detail in the following description. The following are the contents:

Figure 1 depicts a fuel injector according to the related art in a cutaway representation;

Figure 2 depicts a section of a cutaway representation of a fuel injector based on the fundamental kinematic principle underlying the present invention, but not having all of the features of the present invention;

Figure 3 depicts an enlarged representation of section III in Figure 2;

Figure 4 depicts a section of a cutaway representation of a first exemplary embodiments of a fuel injector according to the present invention;

Figure 5 depicts section V in Figure 4;

Figure 6 depicts a section of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector according to the present invention.

Figure 7 depicts a section of a cutaway representation of a detail of a third and fourth exemplary embodiment of a fuel injector according to the present invention.

Description of the Exemplary Embodiments

Before three exemplary embodiments of a fuel injector equipped in accordance with the present invention are described in greater detail on the basis of Figures 4, 5, 6, and 7, an already known fuel injector will first be briefly explained on the basis of Figure 1 with respect to its essential components, for the purpose of improved comprehension, and then, on the basis of Figures 2 and 3, the fundamental kinematic base principle underlying the present invention will be briefly explained.

The fuel injector generally designated as reference numeral 1 has a fuel intake pipe 2, which can be connected via a thread 4 to a fuel line in a generally known manner. Fuel injector 1 is executed in the shape of an injector for fuel injection systems of mixture-compressing, spark-ignition internal combustion engines. Fuel injector 1 is particularly suited for the direct injection of fuel into an undepicted combustion chamber of an internal combustion engine. Via a fuel filter 3, the fuel enters a longitudinal bore hole 6 configured in a core 5. Core 5 has an external thread segment 7, which is screwed to fuel intake pipe 2.

Core 5 at its downstream end 10 is surrounded by solenoid coil 8, which is wound on a coil holder 9. Located downstream of downstream end 10 of core 5 is an armature 11, which is separated from end 10 of core 5 by a slight gap. Armature 11 has bore holes 12 for the passage of the fuel. Armature 11 is also fixedly connected to a valve needle 13, e.g., by welding. At the end opposite armature 11, valve needle 13 has a valve-closure member 14, which cooperates with a valve seat 15 configured on a valve seat support 16. In the example depicted in Figure 1, valve seat support 16 is inserted into a housing body 17 and is sealed by a sealing ring 18.

Housing body 17 can be screwed using a thread 19, e.g., into an undepicted cylinder head of an internal combustion engine. When fuel injector 1 is opened, fuel is injected via at least one spray-discharge opening 20, configured on the downstream end of valve seat support 16, into the also undepicted combustion chamber of the internal combustion engine. Functioning to

improve the distribution of the fuel are, e.g., a plurality of peripherally disposed swirl grooves 21 on valve-closure member 14. Functioning to seal off valve seat support 16 in the bore holes of the cylinder head is a gasket seal 22. Valve needle 13 is guided on guide surfaces 24 in a longitudinal bore hole 23 of valve seat support 16. Between guide surfaces 24 there are flattened-off areas 25, to make possible the unimpeded passage of the fuel.

To open fuel injector 1, solenoid coil 8 is excited by an electrical excitation current, which is supplied via an electrical connecting cable 26. In the resting state of fuel injector 1, armature 11 is acted upon by a first resetting spring 27 contrary to its stroke direction, so that valve-closure member 14 on valve seat 15 is held in the sealing position. When solenoid coil 8 is excited, armature 11 is pulled in the stroke direction toward core 5, the stroke being indicated by the gap existing, in the resting position, between core 5 and armature 11. Valve needle 13, fixedly connected to armature 11, and valve-closure member 14 are carried along in the stroke direction so that valve-closure member 14 releases spray-discharge opening 20.

When the excitation current is switched off, armature 11, valve needle 13, which is fixedly connected to armature 11, and valve-closure member 14 are accelerated by first resetting spring 27 in the closing direction contrary to the stroke direction. If valve-closure member 14 strikes against valve seat 15, the result, due to the elasticity of valve needle 13 and due to the mass of armature 11, which is fixedly connected to valve needle 13, can be a rebound of valve-closure member 14 from valve seat 15. This is highly undesirable because this effect can lead to a renewed short-term opening of fuel injector 1, falsifying both the metering time as well as the metering quantity.

When known fuel injector 1, depicted in Figure 1, is opened, the disadvantage exists that the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, acts on armature 11 and valve needle 13, which is fixedly joined to armature 11. This is unfavorable inasmuch as the magnetic force exerted by solenoid coil 8, immediately after the excitation current is switched on, does not immediately reach its final value due to the self-induction of solenoid coil 8 and due to the eddy currents induced by solenoid coil 8. Therefore, in the initial phase of the opening stroke, a reduced magnetic force is initially exerted on armature 11, which for many application cases leads to an undesirably long opening time.

The embodiment depicted in Figures 2 and 3 functions so as to overcome these disadvantages. Figure 2 depicts a segment in an enlarged, cutaway representation. In this context, in an enlarged view, only those components are shown which are of major importance for the present invention. The configuration of the remaining components can be identical to a known fuel injector 1, in particular a fuel injector 1 depicted in Figure 1. To facilitate comprehension, the elements in Figure 2 already described on the basis of Figure 1 are identified with corresponding reference numerals. In Figure 3, segment III in Figure 2 is depicted in a representation that is also significantly enlarged with respect to Figure 2.

At the end opposite valve-closure member 14, valve needle 13 has a flange 30, which in the depicted example has the shape of a stepped cylinder 37. Armature 11 is not fixedly joined to valve needle 13, but rather is axially movable within preestablished limits with regard to valve needle 13. Valve needle 13, i.e., in the depicted example, flange 30 of valve needle 13, has a first limit stop 32 for armature 11. First limit stop 32 in the depicted example is provided on a first step 31 of flange 30, which is configured as a stepped cylinder 37. A second limit stop 33 is provided on a housing-mounted, stationary adjusting disk 34, which is configured in the example so as to be annular or partially annular, the adjusting disk being able to be inserted into housing body 17. Adjusting disk 34 can be restrained, e.g., by being jammed into place. In addition, it is possible to secure adjusting disk 34 on housing body 17 by a welded seam 35. For axially positioning adjusting disk 34, housing body 17 can have a stepped projection 36. Adjusting disk 34, in this context, when introduced into housing body 17, is inserted until it contacts projection 36 of housing body 17.

In Figures 2 and 3, the resting position of fuel injector 1 is depicted, there being no electrical excitation of solenoid coil 8. As can be seen from his Figure, the distance between first limit stop 32 on flange 30 of valve needle 13 and second, stationary limit stop 33 is dimensioned so that, in the resting state of fuel injector 1, a gap 39 arises between first limit stop 32 and end face 38 of armature 11, opposite first limit stop 32. Armature 11 in the depicted resting state is held in position at second limit stop 33 of stationary adjusting disk 34 by a second resetting spring 40. Second resetting spring 40 is positioned between a first step 41 of flange 30, which is configured as a stepped cylinder 37, and end face 38 of armature 11, opposite first limit stop 32. On second step 41 of stepped cylinder 37, first resetting spring 27 is also supported at an end face 44, located opposite, the first resetting spring also contacting valve

needle 13 via flange 30 and biasing valve needle 13 in the closing direction. As can be seen both from Figure 2 as well as from Figure 3, a second gap 42 exists between downstream end 10 of core 5 and upper end face 38 of armature 11, the second gap being larger dimensioned in the axial direction than first gap 39, which is provided between first limit stop 32 and end face 38 of armature 11.

The mode of functioning of the fuel injector is as follows:

When the fuel injector is opened, after solenoid coil 8 is excited, initially only armature 11 is accelerated in the stroke direction towards second resetting spring 40, at first without carrying with it valve needle 13 and valve-closure member 14, which is connected to valve needle 13. Armature 11, due to the preacceleration, strikes first limit stop 32 so as to have a significant impulse, and carries valve needle 13 and valve-closure member 14 with it. Due to the preacceleration and the impulse of armature 11, a relatively sweeping opening motion is achieved after armature 11 strikes first limit stop 32. In addition, the flight time of armature 11 before striking first limit stop 32 has the advantage that, if the distance between first stop 32 and second limit stop 33 is correctly dimensioned, a delay time is achieved of sufficient length for the magnetic force in the meantime to reach its full intensity. As was already described, in the initial phase of the excitement of solenoid coil 8, the magnetic force generated by solenoid coil 8 is reduced due to the self-induction of solenoid coil 8 and the induced eddy currents. The acceleration of valve needle 13 and of valve-closure member 14 is then achieved at full, not reduced, magnetic force, which also contributes to a short opening time. After reaching first limit stop 32, armature 11, together with valve needle 13 and valve-closure member 14, is accelerated in the stroke direction until end face 38 of armature 11 reaches the downstream end face of end 10 of core 5. First gap 39 therefore determines the preacceleration of armature 11, whereas second gap 42 defines the opening stroke of fuel injector 1.

When fuel injector 1 is closed, armature 11, valve needle 13, and valve-closure member 14 initially move synchronously in the closing direction. As soon as valve-closure member 14 reaches valve seat 15, the motion of valve-closure member 14 and of valve needle 13 is abruptly ended, whereas armature 11 continues to move in the closing direction until armature 11 strikes second limit stop 33. Even if armature 11 rebounds from second limit stop

33, this does not have any negative effect on the opening behavior of fuel injector 1, because second resetting spring 40 prevents armature 11 from once again reaching first limit stop 32. Therefore, valve needle 13 and valve-closure member 14 are prevented from once again being carried along. Finally, armature 11 is held in position at second limit stop 33 by second
5 resetting spring 40, until a new current pulse brings about a new opening of fuel injector 1 by exciting solenoid coil 8.

Therefore, as a result of this measure, both an effective debouncing as well as a relatively short opening time of fuel injector 1 are achieved.

10 Figure 4 depicts a first exemplary embodiment of a fuel injector according to the present invention, in one segment of a cutaway representation. Here too, elements that have already been described are identified with the corresponding reference numerals.

15 In contrast to the embodiment described on the basis of Figures 2 and 3, in the exemplary embodiment according to the present dimension, no adjusting disk 34 is provided. Instead, second limit stop 33 is configured directly on intake-side end face 50 of the connecting part that is configured as valve seat support 16. In the exemplary embodiment depicted in Figure 4, valve seat support 16 is made of a magnetic, in particular, ferritic material. In this context,
20 it must be avoided that a significant magnetic flux flows from armature 11 into valve seat support 16 and then further directly into housing body 17, which closes the magnetic circuit as external pole 59, because this brings about a counterforce acting on armature 11 in the direction contrary to opening, thus reducing the magnetic opening force that is effectively exerted upon armature 11. Rather, care must be taken that the main magnetic flux flows
25 directly from armature 11 into housing body 17, circumventing valve seat support 16. For this purpose, a magnetic restricter 56 is provided on valve seat support 16 directly in the fuel flow direction underneath end face 50 forming second limit stop 33, the restricter being formed by an annular groove 51. As a result of the constriction of the material of valve seat support 16 in the area of restricter 56, the magnetic flux at this location is weakened, so that the main
30 flux overflows directly from armature 11 into housing body 17, i.e., in the reverse direction. A casing 52 is disposed between housing body 17 and armature 11 and valve seat support 16.

Figure 5 depicts the segment designated in Figure 4 as V and clarifies the circumstances

described above. It can be seen that secondary magnetic flux 53, which runs from housing body 17, acting as external magnetic pole 59, via valve seat support 16 to armature 11, is significantly weakened in comparison to main magnetic flux 58, which runs from housing body 17 directly to armature 11.

Figure 6 depicts a segment of a cutaway representation of a detail of a second exemplary embodiment of a fuel injector 1 according to the present invention.

The exemplary embodiment depicted in Figure 6 is distinguished from the exemplary embodiment already described on the basis of Figures 4 and 5 by fact that valve seat support 16 is made of a nonmagnetic material, for example, a ceramic material or a plastic material. Because valve seat support 16 in this exemplary embodiment is made of a nonmagnetic material, no secondary magnetic flux is generated via valve seat support 16, so that restrictor 56 can be dispensed with.

Figure 7 depicts a detail of a third and fourth exemplary embodiment of a fuel injector 1 according to the present invention, also in a segment view of a cutaway representation. In this context, in the left half of Figure 7, a third exemplary embodiment is depicted, and in the right half of Figure 7, a fourth exemplary embodiment. In the third exemplary embodiment, depicted in the left half of Figure 7, valve seat support 16 takes over only the function of guiding armature 11 but not the function of the armature limit stop. For this purpose, on valve seat support 16, an armature guide 57 is provided, which cooperates with an armature shaft 60, which extends axially in the spray-discharge direction from an armature main body 61. Armature guide 57 is executed on the basis of reduced material strength, so that in this area a magnetic restrictor 56 results. Because armature 11 strikes not against valve seat support 16 but rather against another component not depicted in Figure 7, an axial gap 63 exists between armature guide 57 and end face 43 of armature 11, configured on main armature body 61. This axial gap 63 creates additional magnetic insulation of armature 11 from valve seat support 16, which in this exemplary embodiment can be made of a magnetic, i.e., ferritic, material.

In the fourth exemplary embodiment of a fuel injector 1 according to the present invention, depicted in the right half of Figure 7, armature 11 does indeed strike against intake-side end

face 50 of valve seat support 16. However, in this exemplary embodiment, valve seat support 16 does not take on the function of guiding armature 11, but rather only of providing the limit stop. Armature 11 can be guided, for example, in the casing 52. A radial gap 62 is formed between valve seat support 16 and armature shaft 60, which extends from main armature body 61. Because in this exemplary embodiment there is no magnetic restricter 56, valve seat support 16 is advantageously made of a nonmagnetic material, for example a ceramic material.

105201-20092360

What is claimed is:

1. A fuel injector (1) for fuel injection systems of internal combustion engines, in particular for directly injecting fuel into the combustion chamber of an internal combustion engine, having a solenoid coil (8), an armature (11) that can be acted upon by the solenoid coil (8) in a stroke direction in opposition to a first resetting spring (27), a valve needle (13) that is connected to a valve-closure member (14), the valve needle having a first limit stop (32) for the armature (11), the armature (11) additionally being acted upon by a second resetting spring (40), and having a connecting part (16), which supports a valve seat (15) that cooperates with the valve-closure member (14),

wherein

a stationary second limit stop (33) is provided for the armature (11), the second resetting spring (40) acts upon the armature (11) contrary to the stroke direction and, in a resting position when the solenoid coil (8) is not excited, the second resetting spring holds the armature (11) in position at the second limit stop (33) such that the armature (11) is positioned at a preestablished distance from the first limit stop (32), configured on the valve needle (13), the second limit stop (33) being configured on the connecting part (16) and the connecting part (16) being made of a magnetic material, and in the vicinity of the second limit stop (33), a magnetic restricter (56) is provided on the connecting part (16) and/or on the armature (11).

2. A fuel injector (1) for fuel injection systems of internal combustion engines, in particular for directly injecting fuel into the combustion chamber of an internal combustion engine, having a solenoid coil (8), an armature (11) that can be acted upon by the solenoid coil (8) in a stroke direction in opposition to a first resetting spring (27), a valve needle (13) that is connected to a valve-closure member (14), the valve needle having a first limit stop (32) for the armature (11), the armature (11) additionally being acted upon by a second resetting spring (40), and having a connecting part (16), which supports a valve seat (15) that cooperates with the valve-closure member (14),

wherein

a stationary second limit stop (33) is provided for the armature (11), and the second resetting spring (40) acts upon the armature (11) contrary to the stroke direction, and, in a resting position when the solenoid coil (8) is not excited, the second resetting spring

0485905-1025011

0485905-1025011

0485905-1025011

0485905-1025011

0485905-1025011

Abstract

A fuel injector (1) for fuel injection systems of internal combustion engines, in particular for directly injecting fuel into the combustion chamber of an internal combustion engine, has a solenoid coil (8), an armature (11) that can be acted upon by the solenoid coil (8) in a stroke direction in opposition to a first resetting spring (27), and a valve needle (13) connected to a valve-closure member (14). The valve needle (13) has a first limit stop (32) for the movable armature (11), the armature (11) additionally being acted upon by a second resetting spring (40). In addition, a stationary second limit stop (33) is provided for the armature (11). The second resetting spring (40) acts upon the armature (11) contrary to the stroke direction and, in the resting position, when the solenoid coil (8) is not excited, the second resetting spring holds the armature (11) in position at the second limit stop (33) such that the armature (11) is at a preestablished distance from the first limit stop (32), which is configured on the valve needle (13). A connecting part (16) can be made of a magnetic material and can be configured as having a magnetic restricter (56), or it can be made of a nonmagnetic material.

(Figure 4)

FIG 1

Prior Art

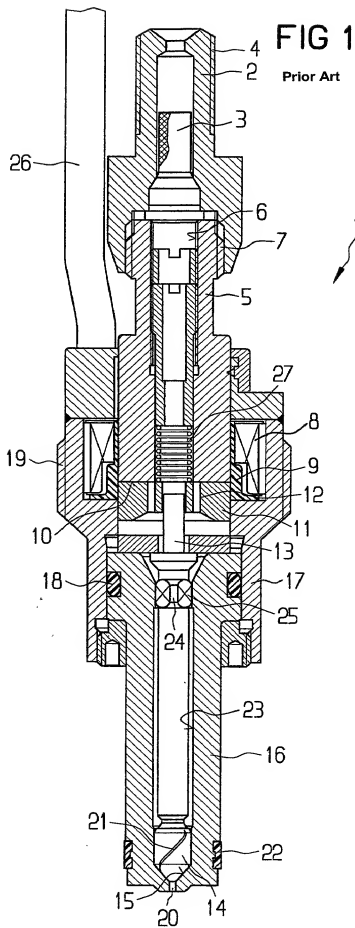


FIG 2

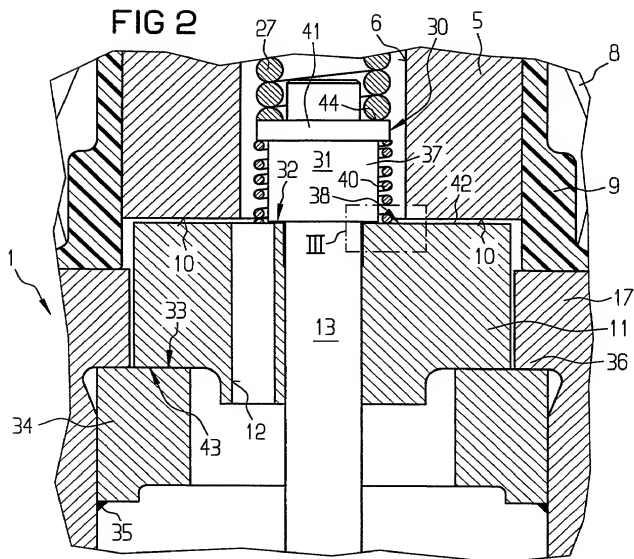


FIG 3

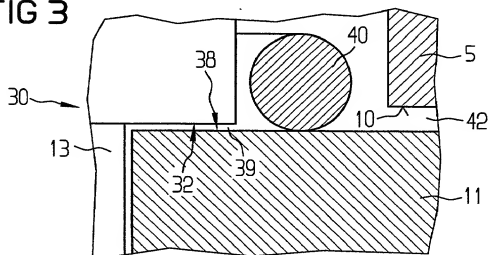


FIG 4

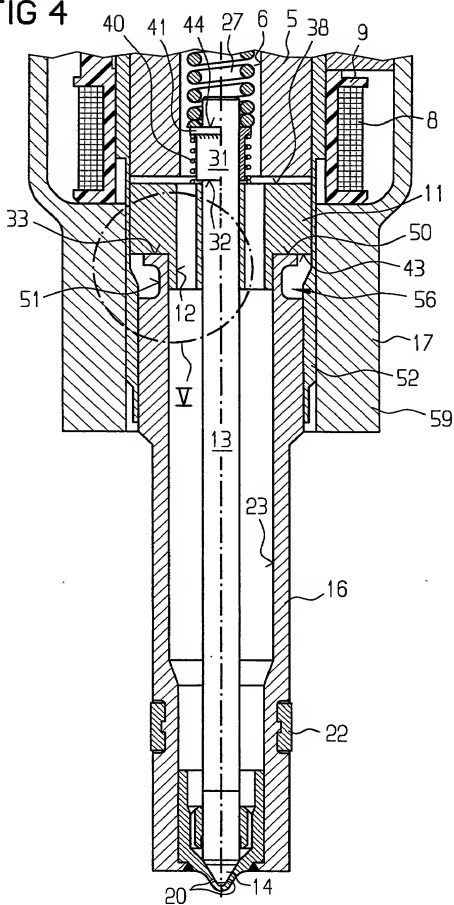


FIG 5

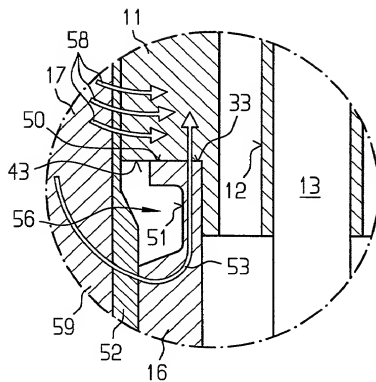


FIG 6


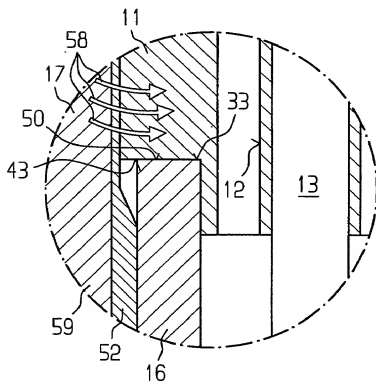


FIG 7



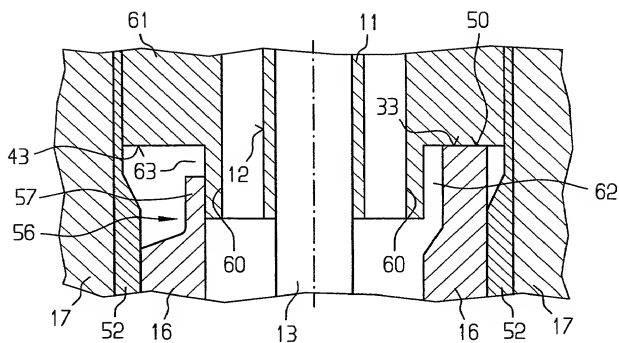

10191/1883

**COMBINED DECLARATION AND
POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **FUEL INJECTOR**, and the specification of which:

- ☐ is attached hereto;
- ☐ was filed as United States Application Serial No. _____ on _____, 19__ and was amended by the Preliminary Amendment filed on _____, 19__.
- ☒ was filed as PCT International Application Number PCT/DE00/03422 on the 28th day of September, 2000.
- ☒ an English translation of which is filed herewith.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a). I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international applications(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

EL244508809
EL244583429/US

09856906.102501

**PRIOR FOREIGN/PCT APPLICATION(S)
AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119**

Country : Federal Republic of Germany

Application No. : 199 46 602.5

Date of Filing: September 29, 1999

Priority Claimed
Under 35 U.S.C. § 119 : ☒ Yes ☐ No

I hereby claim the benefit under Title 35, United States Code § 120 of any United States Application or PCT International Application designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

**PRIOR U.S. APPLICATIONS OR
PCT INTERNATIONAL APPLICATIONS
DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120**

U.S. APPLICATIONS

Number :

Filing Date :

**PCT APPLICATIONS
DESIGNATING THE U.S.**

PCT Number :

PCT Filing Date :

I hereby appoint the following attorney(s) and/or agents to prosecute the above-identified application and transact all business in the Patent and Trademark Office connected therewith.

(List name(s) and registration number(s)):

| | |
|--------------------|-----------------|
| Richard L. Mayer, | Reg. No. 22,490 |
| Gerard A. Messina, | Reg. No. 35,952 |
| _____ | Reg. No. _____ |
| _____ | Reg. No. _____ |

All correspondence should be sent to:

Richard L. Mayer, Esq.
Kenyon & Kenyon
One Broadway
New York, New York 10004

Telephone No.: (212) 425-7200
Facsimile No.: (212) 425-5288



I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1 - 00 Full name of inventor: Hubert STIER

Inventor's signature Hubert Stier Date June, 11th, 2001

Citizenship Federal Republic of Germany

Residence Lindenweg 11
71679 Asperg DE
Federal Republic of Germany

Post Office Address Same as above

09856906-102501